



Kinnickinnic River Sediment-transport Planning Study

Contract No. W40004E01

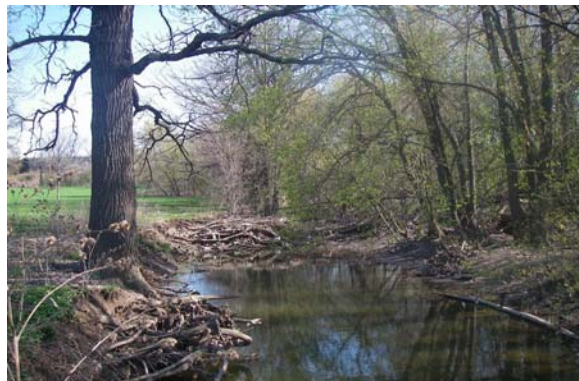

Submitted to: **Milwaukee Metropolitan Sewerage District**
260 West Seeboth Street
Milwaukee, Wisconsin 53204

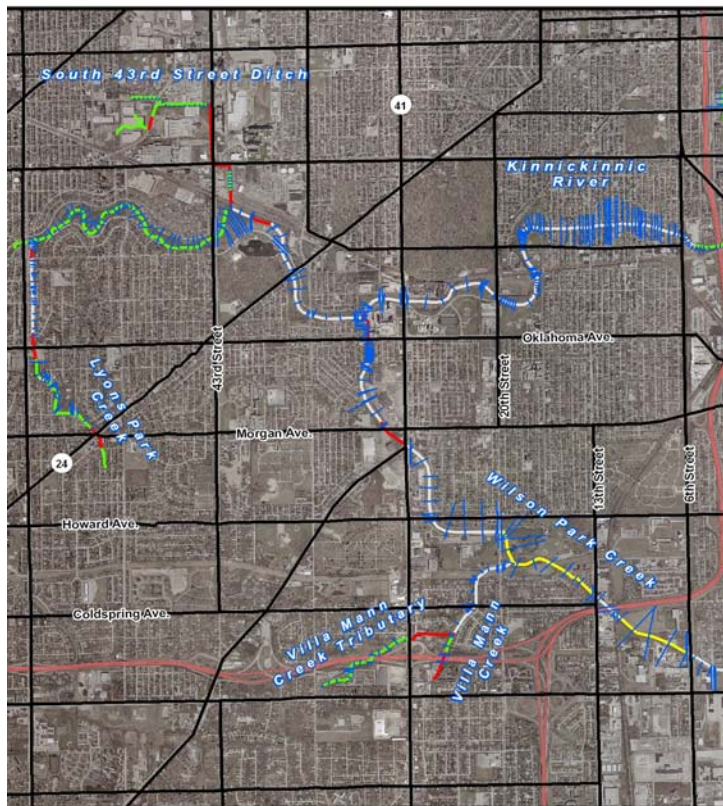

Submitted by:



December 20, 2010

Table of Contents

	<u>Page</u>
<u>EXECUTIVE SUMMARY</u>	
INTRODUCTION	ES-1
WORK PLAN	ES-1
MANAGEMENT RECOMMENDATIONS (MR).....	ES-2
1.1. Hydraulic Capacity	ES-3
1.2. Failed- and Poor-condition Concrete Lining.....	ES-3
1.3. Eroding Channels.....	ES-3
1.3.1. Infrastructure Risk	ES-3
1.3.2. Sediment Reduction	ES-4
1.3.3. Vertical Stabilization	ES-4
1.4. Damaged Bank Protection	ES-4
1.5. Flushing Tunnel Sedimentation.....	ES-4

SURVEYING

1. INTRODUCTION AND BACKGROUND	1
2. SURVEY CONTROL.....	1
3. INITIAL CROSS-SECTION SURVEYS.....	1
4. SUPPLEMENTAL CROSS-SECTION SURVEYS	3
APPENDIX A: Coordinates and Elevations of the Survey Control Points (GPS base station and cross-section endpoints) Established by MMSD	A.1
APPENDIX B: Aerial Photographs Showing the Location of the Cross-section Survey Points	B.1
APPENDIX C.1: Coordinates and Elevations of the Initially Surveyed Cross-section Points	C.1.1
APPENDIX C.2: Comparison of Cross-section Plots Developed Using Data from the Initial Surveys and From the Previously Developed Hydraulic Models	C.2.1
APPENDIX C.3 Cross-section Plots Developed from the Initial Survey Data for Development of New Hydraulic Models or for Converting the MOUSE Model for South 43 rd Street Ditch to HEC-RAS format.....	C.3.1
APPENDIX D.1: Coordinates and Elevations of the Supplemental Survey Points	D.1.1
APPENDIX D.2: Cross-section Plots Developed from the Supplemental Survey Data	D.2.1

List of Surveying Figures

Figure 1. Aerial photograph showing the primary channels within the Kinnickinnic River watershed and the reaches with and without previously developed hydraulic models. Also shown are the control points used in the surveys. 5

Figure 2. Example comparison of model section in the Kinnickinnic River at Sta 35076.5 (previously developed using 2001 survey data) and the section developed using the survey data from this study. 6

Figure 3. Example comparison of model section in Lyons Park Creek at Sta 6020.3 (previously developed using 2001 survey data) and the section developed using the survey data from this study. 6

Figure 4. Example comparison of model section in Wilson Park Creek at Sta 12012.6 (previously developed using the 2005 2-foot contour mapping) and the section developed using the survey data from this study..... 7

Figure 5. Example comparison of model section in the Villa Mann Creek Tributary at Sta 1899.6 (previously developed using the 2005 2-foot contour mapping) and the section developed using the survey data from this study. 7

Figure C.2.1. Comparison of survey section KKRUP-XS2 with the cross section in the Kinnickinnic River model at Sta 35076.53 that was previously developed using 2001 survey data. C.2.1

Figure C.2.2. Comparison of survey section KKRUP-XS1 with the cross-section in the Kinnickinnic River model at Sta 33594.26 that was previously developed using 2001 survey data. C.2.1

Figure C.2.3. Comparison of survey section KKR-XS6 with the cross-section in the Kinnickinnic River model at Sta 12519.59 (source of previously developed model geometry is unknown)..... C.2.2

Figure C.2.4. Comparison of survey section KKR-XS5 with the cross-section in the Kinnickinnic River model at Sta 12398.24 (source of previously developed model geometry is unknown)..... C.2.2

Figure C.2.5. Comparison of survey section KKR-XS4 with the cross-section in the Kinnickinnic River model at Sta 12095.01 (source of previously developed model geometry is unknown)..... C.2.3

Figure C.2.6. Comparison of survey section KKR-XS3 with the cross-section in the Kinnickinnic River model at Sta 11680.14 (source of previously developed model geometry is unknown)..... C.2.3

Figure C.2.7. Comparison of survey section KKR-XS2 with the cross-section in the Kinnickinnic River model at Sta 11254.96 (source of previously developed model geometry is unknown)..... C.2.4

Figure C.2.8. Comparison of survey section KKR-XS1 with the cross-section in the Kinnickinnic River model at Sta 10832.53 (source of previously developed model geometry is unknown)..... C.2.4

Figure C.2.9. Comparison of survey section WPC-XS1 with the model cross-section in Wilson Park Creek at Sta 12012.57 that was previously developed using the 2-foot contour mapping. C.2.5

Figure C.2.10. Comparison of survey section WPC-XS2 with the model cross-section in Wilson Park Creek at Sta 10558.08 that was previously developed using the 2-foot contour mapping. C.2.5

Figure C.2.11. Comparison of survey section LPC-XS2 with the model cross-section in Lyons Park Creek at Sta 6020.3 previously developed using 2001 survey data. C.2.6

Figure C.2.12. Comparison of survey section LPC-XS1 with the model cross-section in Lyons Park Creek at Sta 4140.4 previously developed using 2001 survey data. C.2.6

Figure C.2.13. Comparison of survey section VMC-XS1 with the model cross-section in Villa Mann Creek at Sta 3129.7 that was previously developed using the 2-foot contour mapping. C.2.7

Figure C.2.14. Comparison of survey section VMC-XS2 with the model cross-section in Villa Mann Creek at Sta 3489.6 that was previously developed using the 2-foot contour mapping. C.2.7

Figure C.2.15. Comparison of survey section VMC-XS3 with the model cross-section in the Villa Mann Creek Tributary at Sta 1603 that was previously developed using the 2-foot contour mapping. C.2.8

Figure C.2.16. Comparison of survey section VMC-XS4 with the model cross-section in the Villa Mann Creek Tributary at Sta 1899.6 that was previously developed using the 2-foot contour mapping. C.2.8

List of Surveying Tables

Table 1. Summary of initially surveyed cross sections. 2

Table 2. Summary of supplemental survey cross sections..... 3

Table A.1. Coordinates and Elevations of the Survey Control Points (GPS base station and cross-section endpoints) Established by MMSD (Table also on CD).A.1

Table C.1. Coordinates and Elevations of the Initially Surveyed Cross-section Points..... C.1.1

Table D.1. Coordinates and Elevation of the Supplemental Survey Points..... D.1.1

HYDROLOGY

1. Introduction and background 1

2. measured hydrologic data 1

3. HSPF Rainfall-Runoff Model 3

 3.1. MODEL BACKGROUND 3

- 3.2. MODEL STRUCTURE AND INPUT 3
- 3.3. MODEL EXECUTION..... 3
- 3.4. MODEL RESULTS 4
- 4. Flow-duration curves 4
 - 4.1. EXISTING CONDITIONS 5
 - 4.2. 2020 PLANNED LAND USE CONDITIONS 6
- 5. Instantaneous Peak Flows..... 8
 - 5.1. EXISTING CONDITIONS 8
 - 5.2. 2020 PLANNED LAND-USE CONDITIONS..... 9
- 6. REFERENCES 10

List of Hydrology Figures

- Figure 1. Map showing the overall Kinnickinnic River watershed, the HSPF model subbasins, and the location of the USGS stream gages within the study area... 12
- Figure 2. Computed flow-duration curves from the mean daily flow data at USGS gages with sufficient periods of record. 13
- Figure 3. Computed flood-frequency curve for the Kinnickinnic River at SOUTH 11th St. gage (USGS Gage No. 04087159) for the period between WY1977 and WY2008..... 13
- Figure 4. Computed flood-frequency curve for the Wilson Park Creek at St. Luke’s Hospital gage (USGS Gage No. 040871488) for the period between WY1998 and WY2008..... 14
- Figure 5. Comparison of measured mean daily discharge and the corresponding maximum instantaneous discharge for each day of record at the Kinnickinnic River South 11th Street gage. 14
- Figure 6. Mean daily flow-duration curves based on the measured data at the Kinnickinnic River at 11th Street/Milwaukee gages and the HSPF model output at Node 807 for the concurrent period of record between WY1977 and WY2004..... 15
- Figure 7. Mean daily flow-duration curves based on the measured data at the Wilson Park Creek at St. Luke’s Hospital gage and the HSPF model output at Node 818 for the concurrent period of record between November 1996 and December 2004..... 15
- Figure 8. Computed flood-frequency curves based on measured peak flows at the Kinnickinnic River at South 11th Street gage and from the HSPF model at Node 807 for the coincident period of record between WY1977 and WY2004. .. 16



Figure 9. Computed shift factors for the mean daily flow-duration curves from the HSPF model results at the Kinnickinnic River at South 11th Street and Wilson Park Creek Saint Luke’s Hospital gages. 16

Figure 10. Measured runoff as percent of precipitation at gages on streams in urbanized areas in south Milwaukee. 17

Figure 11. Average annual runoff predicted by the HSPF model for various locations in the study area, and measured runoff at stream gages in urbanized watersheds in the south Milwaukee area. 17

Figure 12. Flow-duration curves along the Kinnickinnic River, Lyons Park Creek, and South 43rd Street Ditch under existing conditions. 18

Figure 13. Flow-duration curves along Wilson Park Creek and Edgerton Ditch under existing conditions. 18

Figure 14. Flow-duration curves along the tributaries to Wilson Park Creek under existing conditions. 19

Figure 15. Percent increase in runoff volume from existing to future conditions predicted by the HSPF model. 19

Figure 16. Flow-duration curves along the Kinnickinnic River, Lyons Park Creek, and South 43rd Street Ditch under 2020 planned land-use conditions. 20

Figure 17. Flow-duration curves along Wilson Park Creek and Edgerton Ditch under 2020 planned land-use conditions. 20

Figure 18. Flow-duration curves along the tributaries to Wilson Park Creek under 2020 planned land-use conditions. 21

Figure 19. Estimated percent increase in peak discharge from existing to 2020 planned land-use conditions. 21

List of Hydrology Tables

Table 1. Summary of USGS Stream Gages located within the Kinnickinnic River Sediment Transport Planning Study Area. 2

Table 2. Summary of HSPF-computed annual runoff volumes (as runoff depth and as percent of precipitation) under existing conditions. Also shown are the adopted runoff values as runoff depth and percent of precipitation. 7

Table 3. Computed peak flood-frequency analysis of the measured data and HSPF model results at the South 11th Street gage on the Kinnickinnic River for the overlapping period of record, and the shift factor used to adjust the HSPF-based curves at the other locations of interest. 8

Table 4. Summary of estimated flood-frequency characteristics under existing conditions. 9

Table 5. Summary of estimated flood-frequency characteristics under 2020 planned land use conditions..... 10

HYDRAULICS

1. INTRODUCTION AND BACKGROUND 1
2. EXISTING HYDRAULIC MODELS..... 1
3. UPDATED HYDRAULIC MODELS 3
3.1. Model Development 3
3.2. Model Validation..... 9
3.3. Model Results..... 9
4. SUMMARY AND CONCLUSIONS 12
5. REFERENCES 12

APPENDIX A: Hydraulic Models for the Kinnickinnic River, Wilson Park Creek, Lyons Park Creek, South 43rd Street Ditch, Villa Mann Creek, and the Tributary to Villa Mann Creek)..... (on CD)

APPENDIX B: Profile Plots of Computed Main Channel Hydraulic Conditions (Velocity, Hydraulic Depth and Top Width) Under Existing Conditions Hydrology..... B.1

APPENDIX C: Profile Plots showing Change in Water-Surface Elevation and Percent Change in Computed Main Channel Hydraulic Conditions (Velocity, Hydraulic Depth, Top Width) between Existing and Future Conditions Hydrology C.1

List of Hydraulics Figures

Figure 1. Aerial photograph showing the channel type (natural, rock-lined, concrete-lined, or enclosed) of the hydraulic model reaches..... 13
Figure 2. Comparison of measured and predicted water-surface elevations at the Kinnickinnic River at South 11th Street gage. 14
Figure 3. Computed water-surface profiles in the project reach of the Kinnickinnic River for a range of existing conditions flows up to the 100-year peak discharge. 15
Figure 4. Computed water-surface profiles in the project reach of Wilson Park Creek for a range of existing conditions flows up to the 100-year peak discharge 16
Figure 5. Computed water-surface profiles in the project reach of Lyons Park Creek for a range of existing conditions flows up to the 100-year peak discharge 17
Figure 6. Computed water-surface profiles in the project reach of South 43rd Street Ditch for a range of existing conditions flows up to the 100-year peak discharge. 18
Figure 7. Computed water-surface profiles in the project reach of Villa Mann Creek for a range of existing conditions flows up to the 100-year peak discharge. 19

Figure 8. Computed water-surface profiles in the project reach of the tributary to Villa Mann Creek for a range of existing conditions flows up to the 100-year peak discharge 20

Figure 9. Subreach-averaged main channel hydraulic depth for the subreaches of the Kinnickinnic River at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology). 21

Figure 10. Subreach-averaged main channel velocity for the subreaches of the Kinnickinnic River at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology). 22

Figure 11. Subreach-averaged main channel topwidth for the subreaches of the Kinnickinnic River at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology). 23

Figure 12. Subreach-averaged main channel hydraulic depth for the subreaches of Wilson Park Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology). 24

Figure 13. Subreach-averaged main channel velocity for the subreaches of Wilson Park Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology)..... 25

Figure 14. Subreach-averaged main channel topwidth for the subreaches of Wilson Park Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology)..... 26

Figure 15. Subreach-averaged main channel hydraulic depth for the subreaches of Lyons Park Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology). 27

Figure 16. Subreach-averaged main channel velocity for the subreaches of Lyons Park Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology)..... 28

Figure 17. Subreach-averaged main channel topwidth for the subreaches of Lyons Park Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology)..... 29

Figure 18. Subreach-averaged main channel hydraulic depth for the subreaches of South 43rd Street Ditch at the 50-, 10-, and 1- mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology)..... 30

Figure 19. Subreach-averaged main channel velocity for the subreaches of South 43rd Street Ditch at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology)..... 31

Figure 20. Subreach-averaged main channel topwidth for the subreaches of South 43rd Street Ditch at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology)..... 32

Figure 21. Subreach-averaged main channel hydraulic depth for the subreaches of Villa Mann Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-,10-, and 100-year peak flows (existing conditions hydrology)..... 33

Figure 22. Subreach-averaged main channel velocity for the subreaches of Villa Mann Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology)..... 34

Figure 23. Subreach-averaged main channel topwidth for the subreaches of Villa Mann Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology)..... 35

Figure 24. Subreach-averaged main channel hydraulic depth for the subreaches of the tributary to Villa Mann Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology). 36

Figure 25. Subreach-averaged main channel velocity for the subreaches of the tributary to Villa Mann Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology). 37

Figure 26. Subreach-averaged main channel topwidth for the subreaches of the tributary to Villa Mann Creek at the 50-, 10-, and 1-percent mean daily flow exceedence levels and the 2-, 10-, and 100-year peak flows (existing conditions hydrology) 38

List of Hydraulics Tables

Table 1. Summary of hydraulic model structure and input. 2

Table 2. Summary of overbank flow paths in the hydraulic models. 4

Table 3: Summary of bridge, culvert and tunnel structures included in the hydraulic models..... 5

Table 4. Summary of existing conditions flows evaluated in the hydraulic models 8

Table 5. Summary of future conditions (2020 PLU) flows evaluated in the hydraulic models..... 8

Table 6. Summary of subreaches used to compute the subreach-averaged hydraulic conditions 10

GEOMORPHOLOGY

- 1. INTRODUCTION 1
 - 1.1. Historical Conditions and Previous Investigations..... 2
- 2. GEOLOGIC AND GEOMORPHIC SETTING..... 4
 - 2.1. Geology and Geomorphology 4
 - 2.2. Soils..... 4
- 3. HYDROLOGY AND HYDRAULICS..... 5
 - 3.1. Hydrology 5
 - 3.2. Hydraulics..... 8
- 4. EXISTING CHANNEL CONDITIONS..... 10
 - 4.1. Sedimentology..... 10
 - 4.2. Subreach Descriptions 12
 - 4.2.1. Kinnickinnic River, Subreaches KKRI through KKR4 12
 - 4.2.2. Kinnickinnic River, Subreach KKR10..... 14
 - 4.2.3. Kinnickinnic River, Subreach KKR11..... 14
 - 4.2.4. Lyons Park Creek, Subreaches LPC1 and LPC2 14
 - 4.2.5. 43RD Street Ditch, Subreaches 43SD1 and 43SD2 15
 - 4.2.6. Unnamed Tributary to Wilson Park Creek 15
 - 4.2.7. Cherokee Park Creek 15
 - 4.2.8. Villa Mann Creek, Subreach VMC1 16
 - 4.2.9. Villa Mann Creek Tributary, Subreaches VMCT1 through VMCT3 16
 - 4.2.10. Holmes Avenue Creek..... 17
 - 4.2.11. Wilson Park Creek, Subreaches WPC1 and WPC2 17
 - 4.2.12. Unlined Section of Wilson Park Creek Upstream of Whitnall Avenue 17
 - 4.3. Bank Erosion and Bank Protection..... 18
 - 4.3.1. Bank Erosion 18
 - 4.3.2. Bank Protection 18
 - 4.4. Bed Erosion..... 20
 - 4.5. Infrastructure 20
 - 4.6. Sediment Deposition in Rock- and Concrete-lined Sections..... 21
- 5. SUMMARY 23
- 6. REFERENCES 24
- APPENDIX A: A.1

List of Geomorphology Figures

Figure 1.1. Aerial photograph showing the channel condition (natural, rock-lined, concrete-lined, and enclosed) of the primary channels evaluated in this study, and the subreaches used to evaluate reach-averaged hydraulic and sediment-transport characteristics..... 29

Figure 1.2. Map showing the boundaries of the MMSD planning area and the watershed and subwatershed boundaries of the Kinnickinnic River and its tributaries (Source: USGS, 2004). 30

Figure 1.3. Part of the 1906 USGS Milwaukee Special Map showing the Kinnickinnic River and its tributaries. The surveys for the map were completed between 1890 and 1899. 31

Figure 1.4. Urbanization of Kinnickinnic River watershed (Interfluve, 2004). 32

Figure 1.5. View upstream of riprapped Kinnickinnic River in vicinity of South 7th Street in 1960 (MMSD Photo 20682). 33

Figure 1.6. View upstream of concrete-lined channel of Kinnickinnic River in vicinity of South 7th Street in 1961 (MMSD Photo 22044). 34

Figure 1.7. View upstream of riprap-lined Kinnickinnic River in vicinity of South 10th Street in 1960 (MMSD Photo 20686). 34

Figure 1.8. View upstream of concrete-lined Kinnickinnic River in vicinity of South 10th Street in 1961 (MMSD Photo 22055). 35

Figure 1.9. View upstream of Kinnickinnic River at South 6th Street following concrete lining of channel in 1961 (MMSD Photo 22083). 35

Figure 1.10. View downstream of Kinnickinnic River in the vicinity of railroad bridge near South 22nd Street in 1960 (MMSD Photo 20941). 36

Figure 1.11. View downstream of Kinnickinnic River in the vicinity of South 22nd Street during construction of concrete-lined channel in 1963 (MMSD Photo 24826). ... 36

Figure 1.12. View upstream of riprap-lined section of Kinnickinnic River in vicinity of South 27th Street in 1956 (MMSD Photo 15115). 37

Figure 1.13. View downstream of construction of concrete-lined section of Kinnickinnic River in vicinity of South 27th Street (MMSD Photo 24635). 37

Figure 1.14. Confluence of Kinnickinnic River and Wilson Park Creek in 1956 (MMSD Photo 15112). 38

Figure 1.15. View downstream of concrete-lined confluence of Kinnickinnic River and Wilson Park Creek in 1963 (MMSD Photo 24634). 38

Figure 1.16. Channelization chronology for Kinnickinnic River and tributaries..... 39

Figure 2.1. 1906 areal geology map (Alden, 1906). 40

Figure 2.2. Surficial geologic map of the Kinnickinnic River watershed (USGS, 2004)..... 41

Figure 3.1. Flood-frequency curves for the Kinnickinnic River at South 11th Street, North Branch Root River at Franklin, Menomonee River at Menomonee Falls and Oak Creek near South Milwaukee. The solid curves are based on measured data at the gages and the corresponding broken lines are derived from the USGS regional regression relationships for non-urbanized streams (Walker and Krug, 2003). 42

Figure 3.2. Results from the incipient motion analysis conducted at representative riffles along the Kinnickinnic River and Lyons Park Creek (Tetra Tech, 2010). 43

Figure 3.3. Bed, top-of-bank, top of constructed channel banks and water-surface profiles for the 1-, 2-, 5-, 10-, 25-, 50- and 100-year peak flows and 1-, 10- and 50-percent exceedence flows for the Kinnickinnic River 44

Figure 3.4. Bed, top-of-bank, top of constructed channel banks and water-surface profiles for the 1-, 2-, 5-, 10-, 25-, 50- and 100-year peak flows and 1-, 10- and 50-percent exceedence flows for Wilson Park Creek 45

Figure 3.5. Bed, top-of-bank, top of constructed channel banks and water-surface profiles for the 1-, 2-, 5-, 10-, 25-, 50- and 100-year peak flows and 1-, 10- and 50-percent exceedence flows for Lyons Park Creek. 46

Figure 3.6. Bed, top-of-bank, top of constructed channel banks and water-surface profiles for the 1-, 2-, 5-, 10-, 25-, 50- and 100-year peak flows and 1-, 10- and 50-percent exceedence flows for the 43rd Street Ditch..... 47

Figure 3.7. Bed, top-of-bank, top of constructed channel banks and water-surface profiles for the 1-, 2-, 5-, 10-, 25-, 50- and 100-year peak flows and 1-, 10- and 50-percent exceedence flows for Villa Mann Creek. 48

Figure 3.8. Bed, top-of-bank, top of constructed channel banks and water-surface profiles for the 1-, 2-, 5-, 10-, 25-, 50- and 100-year peak flows and 1-, 10- and 50-percent exceedence flows for Villa Mann Creek tributary 49

Figure 4.1. Aerial photograph showing the primary channels evaluated in this study, the location of the sediment samples, and the subreaches used to evaluate reach-averaged hydraulic and sediment-transport characteristics. 50

Figure 4.2. Gradation curves for samples collected from the Kinnickinnic River subreaches. 51

Figure 4.3. Gradation curves for samples collected from Wilson Park Creek and the primary tributary channels 52

Figure 4.4. Comparative bed profiles of the Kinnickinnic River between 1978 and 2009..... 53

Figure 4.5. Comparative thalweg profiles for Lyons Park Creek between 1978 and 2009.... 54

Figure 4.6. Comparative thalweg profiles for Wilson Park Creek between 1978 and 2009 55

Figure 4.7. Assessment of the condition of the concrete-lined sections of the Kinnickinnic River and its tributaries..... 56

Figure 4.8. Bed, top-of-berm, and water-surface profiles in Subreaches WPC6 through WPC9 on Wilson Park Creek. The various water-surface profiles represent as-built, with-berm, and with-berm and vegetated conditions for the 2-, 10-, and 100-year peak flows 57

Figure 4.9. Comparison of as-built and existing channel geometry in Subreach WPC8 of Wilson Park Creek where depositional berms have formed on top of the rock lining..... 58

Figure 4.10. Bed, top-of-berm, and water-surface profiles for Subreaches KKR5 and KKR6 of the Kinnickinnic River. The various water-surface profiles represent as-built, with-berm, and with-berm and vegetated conditions for the 2-, 10-, and 100-year peak flows. 59

Figure 4.11. Increases in water-surface elevations for the 2-, 10-, and 100-year peak flows due to the presence of berms and vegetated berms along the rock-lined reaches of Wilson Park Creek..... 60

Figure 4.12. Increases in water-surface elevations for the 2-, 10-, and 100-year peak flows due to the presence of berms and vegetated berms along the concrete-lined reaches of Kinnickinnic River..... 61

Figure A.1. Upstream end of Kinnickinnic River downstream of South 60th Street culverts.....A.1

Figure A.2. Confluence of Lyons Park Creek and Kinnickinnic River.A.1

Figure A.3. View upstream of sheetpile grade-control structure at the downstream end of Reach KKR4. 43rd Street Ditch discharges to the Kinnickinnic River through the concrete culvert just downstream of the grade-control structure....A.2

Figure A.4. Consolidated, clay-rich ground moraine in lower bank and bed of Kinnickinnic River in Reach KKR1.A.2

Figure A.5. Encased pipeline in Reach KKR2 that is acting as a grade-control structure. ...A.3

Figure A.6. Actively eroding bank in Reach KKR2. Till in the bed limits vertical adjustment and enhances lateral erosion.....A.3

Figure A.7. Active bank erosion in Reach KKR1. Alluvium with block failure overlies till in base of bank.....A.4

Figure A.8. Functioning stacked limestone block bank protection in Reach KKR2.....A.4

Figure A.9. Undermined by local scour limestone block bank protection in Reach KKR2....A.5

Figure A.10. Functioning stacked limestone block bank protection in Reach KKR2.....A.5

Figure A.11. Recently emplaced rock riprap on left bank of Kinnickinnic River in Reach KKR2.A.6

Figure A.12. Large wood debris accumulation up- and downstream of the South 43rd Street bridge. Woody debris is delivered to Reaches KKR2 and KKR3 by bank erosion.....A.6

Figure A.13. Large woody debris accumulation in Reach KKR4. Debris accumulation is causing localized bank erosion that reinforces woody debris delivery to the channel. Floodplain is overtopped by the 2-year flow in this reach.....A.7

Figure A.14. Vegetated sediment deposits overlying concrete lining in Reach KKR5.....A.7

Figure A.15. Vegetated sediment deposits overlying concrete lining define low-flow channel of Kinnickinnic River in Reach KKR5.....A.8

Figure A.16. Localized erosion around storm sewer outlet in Reach KKR10. Note erosion of coarse-grained till that forms the terrace.A.8

Figure A.17. Coarse-grained bar-and-bed material in Reach KKR10. The river is terrace-confined in this reach.A.9

Figure A.18. Coarse-grained till in right bank of Kinnickinnic River in Reach KKR10. Till is the source of the bulk of the gravels and cobbles that are deposited in Reach KKR11.....A.9

Figure A.19. Gravel-cobble bars in Reach KKR11..... A.10

Figure A.20. View upstream of gravel-cobble bar in Reach KKR11. MMSD’s aeration plant is located on left bank (looking upstream) just downstream of Chase Avenue bridgeA.10

Figure A.21. Close-up view of gravel-cobble bar material in Reach KKR11. Median size of surface sediments is 36 mm.A.11

Figure A.22. View downstream of the Kinnickinnic River reach of the Lake Michigan estuary.....A.11

Figure A.23. Lateral erosion of till in Reach LPC1 of Lyons Park Creek. Note cobbles in the bed derived from erosion of the till.A.12

Figure A.24. Erosion of till (base of bank) and fine-grained alluvium in Reach LPC2 of Lyons Park Creek.....A.12

Figure A.25. Gravel point-bar inset below pre-incision floodplain of Lyons Park Creek in LPC2.....A.13

Figure A.26. Localized bank slumping in fine-grained alluvium overlying consolidated till in Reach LPC2 of Lyons Park Creek.A.13

Figure A.27. Incised section of Lyons Park Creek in Reach LPC2. Degradation is retarded by the consolidated till outcrop in the bed.....A.14

Figure A.28. Consolidated clay-rich till in the bed of Lyons Park Creek in Reach LPC2.A..14

Figure A.29. Boulder grade-control sills in the bed of Lyons Park Creek in Reach LPC2. ...A.15

Figure A.30. Boulder armoring of the bed of Lyons Park Creek in Reach LPC2.A.15

Figure A.31. Unlined section of 43rd Street Ditch (Reach 43SD1). Very little evidence of vertical instability in reach.A.16

Figure A.32. Minor lateral erosion of till bank in unlined section of 43rd Street Ditch (Reach 43SD1).....A.16

Figure A.33. Rock-lined section of 43rd Street Ditch (Reach 43SD2).A.17

Figure A.34. Rock-lined section of 43rd Street Ditch upstream of the sheetpile grade-control structure upstream of 43rd Street tunnel.A.17

Figure A.35. Rock-lined section of 43rd Street Ditch (Reach 43SD2). Vegetation is growing in the rock lining on the banks.A.18

Figure A.36. Lateral erosion of erosion-resistant tills in the Unnamed TributaryA.18

Figure A.37. Incised section of Unnamed Tributary. Lateral erosion is primary mode of channel adjustment due to presence of till in bed.A.19

Figure A.38. Gravel-cobble bed material derived from erosion of the tills in the unlined section of Unnamed Tributary.A.19

Figure A.39. Localized bank erosion in cemetery section of Unnamed Tributary.....A.20

Figure A.40. Lateral erosion of till-underlain terrace in the upper reaches of Cherokee Park Creek.A.20

Figure A.41. Gravel-cobble bed material in the bed of Cherokee Park Creek.A.21

Figure A.42. Lateral erosion of till-underlain terrace on Cherokee Park Creek. Till outcrop in the bed with a veneer of sand and gravel.....A.21

Figure A.43. Large woody debris jam causing a channel flow split in Cherokee Park Creek.A.22

Figure A.44. Lateral erosion of coarse-grained till along Cherokee Park Creek. Bed material is composed of cobbles and small boulders.....A.22

Figure A.45. Laterally eroding lower reach of Cherokee Park Creek upstream of enclosed section of the channel.A.23

Figure A.46. Upstream portion of the unlined section of Villa Mann Creek (VMC1). Center culvert conveys flow beneath I-43.A.23

Figure A.47. Confluence of Villa Mann Creek and Villa Mann Creek tributary at the head of lined reach VMC2.A.24

Figure A.48. Minimal lateral erosion of consolidated, clay-rich till in the unlined reach of Villa Mann Creek (VMC1).....A.24

Figure A.49. Sand-and-gravel alternate bar in the unlined section of Villa Mann Creek. Lateral erosion in reach is source of bar sediments.A.25

Figure A.50. Upstream end of Villa Mann Creek tributary at head of Reach VMCT1.....A.25

Figure A.51. Sand-and-gravel bed material load overlying cobbles in VMCT1.....A.26

Figure A.52. Failed concrete sills in the bed of Villa Mann Creek tributary reach VMCT1. ..A.26

Figure A.53. Failed concrete and rock riprap grade-control sill in Reach VMCT1.A.27

Figure A.54. Sand-and gravel point bar in bed of Villa Mann Creek Tributary, Reach VMCT1. Lateral erosion of tills is source of sand and gravelA.27

Figure A.55. View downstream of failed grade-control sill in VMCT1. Lateral erosion of terraces is source of deposited sediments in the bed between the sills.....A.28

Figure A.56. Rock-lined section of Villa Mann Creek Tributary. Woody debris jams have caused local channel avulsions.....A.28

Figure A.57. Sand-and-gravel accumulation (upstream of a large woody debris jam) in the bed of Villa Mann Creek Tributary in Reach VMCT2.....A.29

Figure A.58. Grouted rock-lined reach of Villa Mann Creek Tributary (VMCT2) upstream of I-43 crossing.....A.29

Figure A.59. Lateral erosion of Villa Mann Creek Tributary downstream of I-43 in Reach VMCT3. Removal of riparian vegetation has reduced bank root reinforcement.A.30

Figure A.60. Flat-gradient, split-flow reach of Villa Mann Creek Tributary upstream of enclosed section (VMCT4).A.30

Figure A.61. Upper unlined and channelized reach of Holmes Avenue Creek upstream of concrete-lined section.A.31

Figure A.62. Lateral erosion of channelized section of Holmes Avenue Creek upstream of lined reach.....A.31

Figure A.63. Unlined and channelized section of Holmes Avenue Creek upstream of concrete-lined section.A.32

Figure A.64. Spoil pile on right bank of Holmes Avenue Creek that is a source of sand and gravel to the channelA.32

Figure A.65. View upstream of downstream ends of culverts under Whitnall Avenue. Sand and fine gravel deposits are derived from upstream channel erosion.....A.33

Figure A.66. View upstream into incised section of Edgerton Ditch (East Branch) upstream of excavated culverts under Whitnall Avenue.....A.33

Figure A.67. Incision-induced bank erosion in cattail wetland upstream of Whitnall Avenue (East Branch Edgerton Ditch).....A.34

Figure A.68. View downstream of incised South Branch of Edgerton Ditch on east side of Whitnall Avenue. Culverts under the road can be seen in the background.....A.34

Figure A.69. Lateral erosion of incised South Branch of Edgerton Ditch on east side of Whitnall Avenue.A.35

Figure A.70. View downstream of the transition between the concrete-lined section (WPC5) and the rock-lined section (WPC6) of Wilson Park Creek.A.35

Figure A.71. View downstream of sediment deposits over the rock riprap on the banks in the rock-lined Reach WPC6. Note sand-and-gravel deposits in the bed....A.36

Figure A.72. Close-up view of fine sediment deposits within and over rock riprap in rock-lined section of Wilson Park Creek (WPC6).....A.36

Figure A.73. View downstream of rock-lined section of Wilson Park Creek (WPC6). The tops of the tree-lined vegetated depositional berms define the frequently occurring flows channel.....A.37

Figure A.74. Well-defined depositional berms overlying rock riprap that support riparian vegetation in Reach WPC6 of Wilson Park Creek.....A.37

Figure A.75. Well-defined depositional berms along Wilson Park Creek in Reach WPC6. ...A.38

Figure A.76. Depositional berm over rock riprap in rock-lined section of Wilson Park Creek (WPC8).....A.38

Figure A.77. View downstream of the transition between the concrete-lined (WPC7) and rock-lined (WPC8) sections of Wilson Park Creek. Note the bed-material accumulation on the concrete and the well-defined berms in the rock-lined section.A.39

Figure A.78. Extensive sand-and-gravel deposits in rock-lined bed of Wilson Park Creek in Reach WPC8.A.39

Figure A.79. View downstream of rock-lined section (WPC8) of Wilson Park Creek. Note riparian vegetation growing in the riprap and on the berms.A.40

Figure A.80. Local erosion of depositional berm on left bank of Wilson Park Creek due to woody debris accumulation around tree on opposite bank (WPC8).....A.40

Figure A.81. View downstream of Villa Mann Creek from 20th Street Bridge. Note depositional berms overlying concrete lining in Reach VMC4.....A.41

Figure A.82. Root-reinforced depositional material overlying concrete lining in lower reach of Villa Mann Creek (VMC4).....A.41

List of Geomorphology Tables

Table 3.1. Summary of estimated flood-frequency characteristics under existing conditions. 7

Table 4.1. Summary of grain-size distribution parameters for the Kinnickinnic River. Samples are listed from upstream to downstream (refer to Figure 4.1 for locations). 11

Table 4.2. Summary of grain-size distribution parameters for the Kinnickinnic River tributaries. Samples are listed from upstream to downstream (refer to Figure 4.1 for locations)..... 11

Table 4.3. Summary of bank erosion by subreach..... 18

Table 4.4. Summary of bank protection by subreach..... 19

Table 4.5. Summary of concrete channel lining condition by subreach 21

SEDIMENT TRANSPORT

1. INTRODUCTION 1

2. BACKGROUND INFORMATION..... 1

 2.1. Subreach-averaged Hydraulic Results 1

 2.2. Bed-material Sediment Data 4

3. INCIPIENT MOTION ANALYSIS..... 7

4. SEDIMENT-TRANSPORT CAPACITY 9

 4.1. Selection of Sediment-Transport Formula..... 10

 4.2. Sediment-transport Capacity Rating Curves 11

 4.3. Annual Sediment-transport Volumes..... 11

 4.4. Effective Discharge 12

5. SEDIMENT-CONTINUITY ANALYSIS—EXISTING CONDITIONS 13

6. SEDIMENT-TRANSPORT ANALYSIS—FUTURE CONDITIONS¹⁵

7. LAKE MICHIGAN SEICHING EFFECTS 17

8. SUMMARY AND CONCLUSIONS 18

9. REFERENCES 20

APPENDIX A: Selected photographs taken during the April 2009 field reconnaissance.....A.1

List of Sediment-transport Figures

Figure 1.1. Aerial photograph showing the primary channels evaluated in this study, the location of the sediment samples, and the subreaches used to evaluate reach-averaged hydraulic and sediment-transport characteristics. 22

Figure 2.1. Aerial photograph showing the channel type (natural, rock-lined, concrete-lined, and enclosed) of the primary channels evaluated in this study, and the subreaches used to evaluate reach-averaged hydraulic and sediment-transport characteristics 23

Figure 2.2. Subreach-averaged main channel hydraulic depths for the subreaches of the Kinnickinnic River at the 50-, 10- and 1-percent mean daily flow exceedence levels and the 2-, 10- and 100-year peak flows (existing conditions hydrology). Note the subreaches are color-coded by channel type. 24

Figure 2.3. Subreach-averaged main channel velocities for the subreaches of the Kinnickinnic River at the 50-, 10- and 1-percent mean daily flow exceedence levels and the 2-, 10- and 100-year peak flows (existing conditions hydrology). Note the subreaches are color-coded by channel type. 25

Figure 2.4. Subreach-averaged main channel topwidths for the subreaches of the Kinnickinnic River at the 50-, 10- and 1-percent mean daily flow exceedence levels and the 2-, 10- and 100-year peak flows (existing conditions hydrology). Note the subreaches are color-coded by channel type. 26

Figure 2.5. Subreach-averaged main channel hydraulic depths for the subreaches of Wilson Park Creek at the 50-, 10- and 1-percent mean daily flow exceedence levels and the 2-, 10- and 100-year peak flows (existing conditions hydrology). Note the subreaches are color-coded by channel type. 27

Figure 2.6. Subreach-averaged main channel velocities for the subreaches of Wilson Park Creek at the 50-, 10- and 1-percent mean daily flow exceedence levels and the 2-, 10- and 100-year peak flows (existing conditions hydrology). Note the subreaches are color-coded by channel type. 28

Figure 2.7. Subreach-averaged main channel topwidths for the subreaches of Wilson Park Creek at the 50-, 10- and 1-percent mean daily flow exceedence levels and the 2-, 10- and 100-year peak flows (existing conditions hydrology). Note the subreaches are color-coded by channel type 29

Figure 2.8. Aerial photograph showing the location of the modeled reach of Cherokee Park Creek. 30

Figure 2.9. Aerial photograph showing the location of the modeled reach of the unnamed tributary to Wilson Park Creek..... 31

Figure 2.10. Aerial photograph showing the location of the modeled reach of Holmes Avenue Creek..... 32

Figure 2.11. Subreach-averaged main channel velocities in Cherokee Park Creek, the unnamed tributary to Wilson Park Creek, and Holmes Avenue Creek..... 33

Figure 2.12. Subreach-averaged main channel hydraulic depths in Cherokee Park Creek, the unnamed tributary to Wilson Park Creek, and Holmes Avenue Creek..... 33

Figure 2.13. Subreach-averaged main channel top widths in Cherokee Park Creek, the unnamed tributary to Wilson Park Creek, and Holmes Avenue Creek..... 34

Figure 2.14. Representative gradation curves for the Kinnickinnic River subreaches, and the gradation curves from the samples collected along the Kinnickinnic River... 35

Figure 2.15. Representative gradation curves for Wilson Park Creek and the primary tributary channels evaluated in this study, and the gradation curves from other samples not used for developing the representative gradations..... 36

Figure 3.1. Results from the incipient motion analysis conducted at representative riffles along the Kinnickinnic River and Lyons Park Creek..... 37

Figure 4.1. Computed sediment-transport (bed material) capacity rating curves for the subreaches along the Kinnickinnic River..... 38

Figure 4.2. Computed sediment-transport (bed material) capacity rating curves for the subreaches along Wilson Park Creek 39

Figure 4.3. Computed sediment-transport (bed material) capacity rating curves for the subreaches along Lyons Park Creek (LPC) and South 43rd Street Ditch (43SD). 40

Figure 4.4. Computed sediment-transport (bed material) capacity rating curves for the subreaches along the tributaries to Wilson Park Creek, including Villa Mann Creek (VMC), the tributary to Villa Mann Creek (VMCT), Holmes Avenue Creek (HAD), Cherokee Park Creek (CPC), and the unnamed tributary to Wilson Park Creek (UNT). 41

Figure 4.5. Estimated mean daily flow-duration curves for the Kinnickinnic River, Lyons Park Creek, and South 43rd Street Ditch under existing conditions..... 42

Figure 4.6. Estimated mean daily flow-duration curves for Wilson Park Creek and Edgerton Ditch (upstream reaches of Wilson Park Creek) under existing conditions. 42

Figure 4.7. Estimated mean daily flow-duration curves for the tributaries to Wilson Park Creek under existing conditions. 43

Figure 4.8. Computed average annual sediment-transport capacity volume in each of the subreaches along Lyons Park Creek and the Kinnickinnic River, and in the downstream reaches of the primary tributaries (South 43rd Street Ditch and Wilson Park Creek). Also shown is the representative median grain size in each of the subreaches..... 43

Figure 4.9. Computed average annual sediment-transport capacity volume in each of the subreaches along Wilson Park Creek and in the downstream reaches of the primary tributaries (Holmes Avenue Creek, Villa Mann Creek, and the combined

volume of Wilson Park Creek and the unnamed tributary to Wilson Park Creek. Also shown is the representative median grain size in each of the subreaches. 44

Figure 4.10. Example histogram of incremental bed-material load and incremental water volume by discharge class for Subreach KKR1. 44

Figure 4.11. Estimated effective discharge in each of the natural and rock-lined subreaches, and the corresponding mean daily flow exceedence percentage..... 45

Figure 5.1. Comparison of annual bed material capacity and supply for each subreach along Lyons Park Creek and the Kinnickinnic River. Note the proposed improvements in Subreach KKR10 include rock-lining for the majority of the reach between South 6th Street and the Interstate 94 Bridges. 45

Figure 5.2. Comparison of annual bed material capacity and supply for each subreach along Wilson Park Creek. 46

Figure 5.3. Computed annual aggradation or degradation volume and depth for each subreach along Lyons Park Creek and the Kinnickinnic River. 46

Figure 5.4. Computed annual aggradation or degradation volume and depth for each subreach along Wilson Park Creek and the Kinnickinnic River..... 47

Figure 5.5a. Comparison of 2004 and 2009 surveyed cross section in the Kinnickinnic River (Sta 35069.16). 48

Figure 5.5b. Comparison of 2004 and 2009 surveyed cross section in Lyons Park Creek (Sta 6016.88)..... 48

Figure 5.6. Comparison of measured annual change in mean bed elevation (from survey information) with the predicted results from the sediment-continuity analysis where comparative information was available in the Kinnickinnic River..... 49

Figure 5.7. Comparison of measured annual change in mean bed elevation (from survey information) with the predicted results from the sediment-continuity analysis where comparative information was available in Lyons Park Creek. 49

Figure 6.1. Flow-duration curves along the Kinnickinnic River, Lyons Park Creek, and South 43rd Street Ditch under 2020 planned land-use conditions. 50

Figure 6.2. Flow-duration curves along Wilson Park Creek and Edgerton Ditch under 2020 planned land-use conditions..... 50

Figure 6.3. Flow-duration curves along the tributaries to Wilson Park Creek under 2020 planned land-use conditions..... 51

Figure 6.4. Annual bed-material transport capacity volumes under existing and future (2020) conditions for the subreaches along Lyons Park Creek, the Kinnickinnic River, and the downstream subreach of South 43rd Street Ditch..... 51

Figure 6.5. Annual bed-material transport capacity volumes under existing and future (2020) conditions for the subreaches along Wilson Park Creek and the downstream subreach of its primary tributaries..... 52

Figure 6.6. Computed annual volume of aggradation or degradation under existing and future (2020 planned land use) conditions in the natural and rock-lined reaches of the Kinnickinnic River, Lyons Park Creek, and Wilson Park Creek. Also shown is the corresponding change in bed elevation..... 52

Figure 7.1a. Measured annual minimum and maximum water level in Lake Michigan for the period between 1971 and 2009..... 53

Figure 7.1b. Measured mean daily water level in Lake Michigan for the period between 1971 and 2009. Also shown are the mean and the mean plus and minus one standard deviation water levels. 53

Figure 7.2. Computed water-surface profiles in the downstream reaches of the Kinnickinnic River using the Lake Michigan water level that represents the mean plus one standard deviation (581.4 feet) and the mean minus one standard deviation (578.8 feet). 54

Figure 7.3. Difference in the computed water-surface elevation using the Lake Michigan water level that represents the mean plus one standard deviation (581.4 feet) and the mean minus one standard deviation (578.8 feet). 54

Figure 7.4. Bed material sediment-transport capacity rating curves under low- (mean minus one standard deviation), mean- and high- (mean plus one standard deviation) seiche conditions for the affected subreaches..... 55

Figure 7.5. Measured water level in Lake Michigan and mean daily flow for the period between January 1991 and December 1993..... 55

Figure 7.6. Computed aggradation or degradation in Subreach KKR10 from the sediment-continuity analysis that included the effects of the Lake Michigan water level. 56

Figure 7.7. Computed aggradation or degradation in Subreach KKR11 from the sediment-continuity analysis that included the effects of the Lake Michigan water level. 57

Figure A.1. View of Sample KKR-1 near the upstream limit of Subreach KKR1.....A.1

Figure A.2. View of armor material and location of Pebble Count KKR-2 and Subsurface Sample KKR-8 in Subreach KKR1 of the Kinnickinnic River.....A.2

Figure A.3. View of Sample KKR-2 in Subreach KKR3A.3

Figure A.4. View of Sample KKR-7 in Subreach KKR3A.3

Figure A.5. View of armor material at location of Pebble Count KKR-1 in Subreach KKR3A.4

Figure A.6. View of Sample KKR-5 in Subreach KKR5A.5

Figure A.7. View of Sample KKR-3 collected from the deposits below an outfall in Subreach KKR5.....A.6

Figure A.8. View of Sample KKR-4 in Subreach KKR6A.7

Figure A.9. View of Sample KKR-6 in Subreach KKR8A.7

Figure A.10. View of Subsurface Sample KKR-9 collected from the substrate underlying the coarse surface material sampled in Pebble Count PC KKR-3 in Subreach KKR10.....A.8

Figure A.11. View of Subsurface Sample KKR-10 collected from the substrate underlying the coarse surface material below Pebble Count PC KKR-4 in Subreach KKR11A.9

Figure A.12. View of coarse-grained mid-channel bar and location of Pebble Count PC KKR-3 in Subreach KKR10.A.10

Figure A.13. View of coarse-grained mid-channel bar and location of Pebble Count PC KKR-4 in Subreach KKR11A.11

Figure A.14. View of bed material deposit and location of Sample WPC-1 in Wilson Park Creek (Subreach WPC8), with inset view showing bed material.....A.12

Figure A.15. View of bed material in the upstream reaches of Wilson Park Creek (above Holmes Avenue Creek). Note the material is mostly sand and fine to medium gravel.....A.12

Figure A.16. View of accreted bank and location of Bank Sample WPC-2 in Wilson Park Creek (Subreach WPC8).....A.13

Figure A.17. View of Sample LPC-1 (Subreach LPC2 of Lyons Park Creek). This material is representative of the overall bed material load observed throughout Lyons Park Creek.....A.13

Figure A.18. View downstream along riffle with armor material sampled in Sample LPC-2 (Subreach LPC1 of Lyons Park Creek).A.14

Figure A.19. View of Sample 43SD-1 collected from a bed material deposit upstream from South 43rd Street in Subreach 43SD2 of South 43rd Street Ditch.....A.14

Figure A.20. View looking upstream in Subreach LPC1 through a reach that is in balance with the upstream sediment loads.....A.15

Figure A.21. View looking downstream along the upper reach of South 43rd Street Ditch that appears to be in balance with upstream sediment loads.....A.15

Figure A.22. View looking upstream toward the incising reach of the East Branch of Wilson Park Creek (East of Whitnall Avenue) that has a headcut (not visible) and eroding banksA.16

Figure A.23. View looking upstream along the eroding left bank of the South Branch of Wilson Park Creek (east of Whitnall Avenue).....A.16

Figure A.24. View looking upstream along Subreach WPC1 that appears to be in balance with the upstream sediment supply.....A.17

Figure A.25. View looking downstream along an eroding left bank in Subreach VMC1A.17

Figure A.26. View looking upstream to the outfall at the head of the tributary to Villa Mann Creek. Note very little sediment has accumulated in the pool below the outfall.A.18

Figure A.27. View looking upstream at failed grade control structure and channel incision in the tributary to Villa Mann CreekA.18

Figure A.28. View of eroding bank in the unlined portion of Holmes Avenue Creek.....A.19

Figure A.29. View downstream of deeply incised reach of Cherokee Park Creek.....A.19

Figure A.30. View downstream of the unnamed tributary to Wilson Park Creek that appears to be in equilibrium with the upstream sediment supply.A.20

List of Sediment-transport Tables

Table 2.1. Summary of subreaches used to compute the subreach-averaged hydraulic conditions and sediment-transport characteristics 2

Table 2.2. Summary of representative subreach gradations..... 5

Table 3.1. Summary of data for incipient motion analysis of selected riffle locations..... 9

Table 5.1. Summary of computed aggradation/degradation depths and observed trends of aggradation and degradation by subreach..... 15

MANAGEMENT AND PLANNING

1. INTRODUCTION 1

2. SUMMARY OF EXISTING CONDITIONS 1

3. RECOMMENDATIONS 4

 3.1. Hydraulic Capacity 4

 3.2. Failed- and Poor-condition Concrete Lining 6

 3.3. Eroding Channels 9

 3.3.1. Infrastructure Risk..... 9

 3.3.2. Sediment Reduction 11

 3.3.3. Vertical Stabilization 11

 3.4. Damaged Bank Protection 13

 3.5. Flushing Tunnel Sedimentation 13

4. FUTURE STUDY NEEDS..... 14

5. REFERENCES 14

APPENDIX A: Summary Sheets Outlining Recommendations for Replacement of Failed-
and Poor-rated Concrete LiningA.1

APPENDIX B: Summary Sheets Outlining Recommendations for Channel-stability
Measures.....B.1

List of Management Recommendation Figures

Figure 3.1. Locations of Failed-and Poor-rated concrete-lined channel segments. 16

Figure 3.2a. Recommended approximate cross-sectional geometry for the potentially
replaced channel in Subreach KKR5. 17

Figure 3.2b. Recommended approximate cross-sectional geometry for the potentially
replaced channel in Subreach KKR7. 17

Figure 3.2c. Recommended approximate cross-sectional geometry for the potentially
replaced channel in Subreach KKR9. 18

Figure 3.3. Locations of eroding banks on the Kinnickinnic River. 19

Figure 3.4. Locations of eroding banks along Lyons Park Creek. 20

Figure 3.5. Locations of eroding banks along the 43rd Street Ditch..... 21

Figure 3.6. Locations of eroding banks along Villa Mann Creek and Villa Mann Creek
Tributary. 22

Figure 3.7. Locations of eroding banks along Holmes Avenue Creek..... 23

Figure 3.8. Existing channel bed profile in Subreaches KKR1 through KKR3 of the
Kinnickinnic River, and the estimated equilibrium slope profile showing the
location and drop height of the recommended grade-control structures. 24

Figure 3.9. Existing channel bed profile in Subreaches KKR1 through KKR3 of the
Kinnickinnic River, and the estimated equilibrium slope profile showing the
location and drop height of the recommended grade-control structures. 25

Figure 3.10. Aerial photograph showing the locations of the recommended grade-control
structures and the estimated drop heights under future equilibrium conditions.
Also identified are the existing grade-control structures and associated drop
heights 26

Figure 3.11. Locations of damaged and failed existing bank protection measures on the
Kinnickinnic River. 27

List of Management Recommendation Tables

Table 2.1. Summary of estimated annual bed- and bank-erosion-derived sediment yields from unlined channels within the Kinnickinnic River watershed. 3

Table 3.1. Summary of channel capacities by subreach for the Kinnickinnic River and MMSD jurisdictional tributaries. 5

Table 3.2. Summary of Failed- and Poor-rated concrete lining in the Kinnickinnic River and MMSD jurisdictional tributaries (refer to Figure 3.1 for locations of individual sites). 7

Table 3.3. Summary of high- and medium-priority erosion sites on the Kinnickinnic River and MMSD jurisdictional tributaries. 10

Table 3.4. Summary of existing and recommended grade-control structures 12

Table 3.5. Summary of damaged and failed existing bank protection on the Kinnickinnic River (refer to Figure 3.8 for location of sites). 14

GIS DATA SUMMARY AND WEB APPLICATION – USER’S GUIDE

1. INTRODUCTION 1

 1.1 Background 1

 1.2 Data 2

 1.3 Web Application 2

2. WEB APPLICATION USER’S GUIDE 3

 2.1 The User Interface 3

 2.2 Exploring the Data 3

 2.2.1 Zoom and Pan 3

 2.2.2 Background Types 5

 2.2.3 Zooming to Watershed or Stream 5

 2.2.4 Controlling the Data Layers 5

 Field Photos 7

 Cross Section Locations 8

 Woody Debris Jams 10

 Field Inventory Lines 11

 2.25 The Earth Background Type 12

 2.3 Data in the Web Mapping Application 14

 2.3.1 Google Maps Data Format 14

 2.3.2 Timeliness and Consistency of the Map Data 15

- 2.4 Application Maintenance 15
 - 2.4.1 Updating or Replacing a Data Set..... 15
 - 2.4.2 Adding Additional Data Layers 17

- Updating the user interface 17
- Updating the data handling code 17

- 3. PROJECT GIS DATA 20
 - 3.1 Kinnickinnic River GIS Data 20
 - 3.1.1 Data Flow 20
 - 3.1.2 Data Processing 20
 - 3.1.3 Final Kinnickinnic River Data Set 20

 - 3.2 Data Integration from Previous Studies 22
 - 3.2.1 Polyline Data 22

 - Field Mapping Lines 23
 - Cross Sections 24
 - Centerlines 24

 - 3.2.2 Point Data 24
 - Photo Points 24
 - Large Woody Debris (LWD) 25
 - River Miles 25

 - 3.2.3 KLM..... 25

List of GIS Data Summary and Web Application – User’s Guide Figures

- Figure 1. The main window with the various parts labeled. 3
- Figure 2. The Zoom to Rectangle tool. 4
- Figure 3. Layers are disabled indicating that you need to zoom in closer in order to display the data layer. 6
- Figure 4. Layers are enabled indicating that they can be displayed. 6
- Figure 5. The Field Inventory Lines layer group. 7
- Figure 6. Photo points displayed with the info window activated. 8
- Figure 7. Cross section points displayed with the info window activated..... 9
- Figure 8. Example of modeling output associated with a cross section..... 10



Figure 9. Large Woody Debris points displayed with the info window activated..... 11

Figure 10. Bank Erosion lines displayed with the info window activated. 12

Figure 11. Click the Download the Google Earth Plugin to start the install, then click Run on each of the next two dialog boxes..... 13

Figure 12. The Google Earth Controls. 14

List of GIS Data Summary and Web Application – User’s Guide Tables

Table 1. Studies that contributed data to the GIS..... 15

Table 2. Feature Class descriptions field data polylines. 23